
Cadillac Zero Oil Filter offering a high compressed air assembly along with Three Stage submicronic arrestance in different flow

Selection Chart

Model	Pipe Connection	Flow rate		Dimensions		
	BSP/NB	NM ³ /hr	SCFM	Α	В	С
CZO - 25	3/8"	43	25	670	380	250
CZO - 50	1/2"	85	50	✓.	/	/
CZO - 75	3/4"	127	75	1	1	/
CZO - 100	3/4"	170	100	1	/	1
CZO - 125	1"	212	125	720	410	300
CZO - 200	1"	340	200	1	/	/
CZO - 250	114"	425	250	1	/	1
CZO - 300	114"	510	300	/	1	1
CZO - 350	1 1 2	595	350	770	450	340
CZO - 500	2	850	500	820	450	340
CZO - 675	2"	1148	675	/	/	/
CZO - 1000	3"	1700	1000	1000	550	450
CZO - 1250	3"	2125	1250	1	1	/

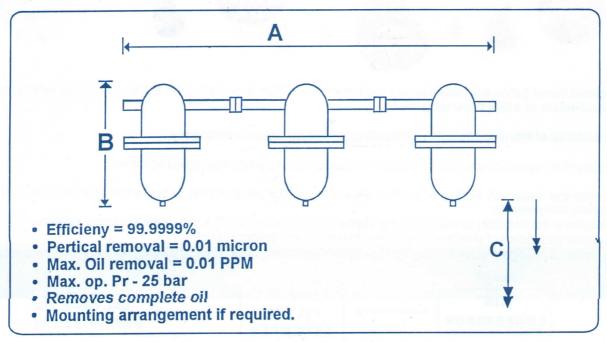

^{*}If necessary we provide D.P. Switch, Pressure Switch Auto Draincock and various Auto Signal instrument along with control panel.

*CP/CPZ/CPZF/S32

Due to continous improvement in R & D, above change without notice.

^{*}As per Clients requirement inlet & outlet pipe connection may be change on reuest.